

Meet us in Amsterdam feb 1-3

Stand # 5R 94, invitation N° 706570

- [Home](#)
 - [Press links](#)
 - [good & bad reasons](#)
 - [3D](#)
- [Projection screens](#)
 - [Acoustically transparent electric screens](#)
 - [RM 2-T](#)
 - [Acoustically transparent fixed frame screens](#)
 - [RF \(Fixed-Frame Screen\)](#)
 - [TAM 2](#)
 - [TAM 2 TB](#)
 - [TAM 2 L](#)
 - [Vistacurve](#)
- [Fabrics](#)
 - [Enlightor 1](#)
 - [EN1 silver backing](#)
 - [Enlightor 3](#)
 - [Enlightor 4K](#)
 - [Black Backing](#)
- [Accessories](#)
 - [WAEB pdf](#)
 - [TAM2 controls](#)
 - [RM 2T and ICE controls](#)
- [Tutorials](#)
 - [AT Screens](#)
 - [History](#)
 - [Screens FAQ](#)
- [Sales Network](#)
 - [AUSTRALIA](#)
 - [AUSTRIA](#)
 - [CANADA](#)
 - [CHINA](#)
 - [FINLAND](#)
 - [FRANCE](#)
 - [INSTALLERS & RETAILERS](#)

RM2-T (reference motorized tensioned) electric screens

A motorised rolling screen is the best solution for integrating a Home Theater in a living room. Small and discrete when retracted, it provides a large projection surface whenever required. The RM2-T provided with tensioned Enlightor 4K projection surface is offering the only no-compromise solution.



[image Studio 238 by courtesy of Institut National de l'Audiovisuel \(INA\) -France](#)


Screen Excellence RM2-T is setting a world standard in retractable screens. Combining the very best existing retractable platform, developed by Chris Seymour, it is fitted with our benchmark projection surface, the Enlightor 4K fabric.

- No Moiré effect in any situation- Full compatibility with all existing projectors
- Beyond 4K resolution in any picture size
- 3D compatible with active glasses technologies
- AT Woven Black Backing fabric. Eliminates rear wall light reflection
- Absolutely flat **projection surface**
- 2" Infinite Black[™] velvet borders - Accurate image framing and enhanced **contrast** perception

•

Features	RM 80 HD	RM 80 WS	RM 90 HD	RM 90 WS	RM 96 HD	RM 96 WS	RM 100 HD	RM 100 WS	RM 110 HD	RM 110 WS	RM 120 HD	RM 120 WS
Aspect ratio	1.78	2.37	1.78	2.37	1.78	2.37	1.78	2.37	1.78	2.37	1.78	2.37
Base (cm)	203	203	229	229	244	244	254	254	279	279	305	305
Diagonal (cm)	233	221	263	249	280	265	291	276	320	304	350	331
Max. drop (cm)*	76	104	62	93	57	89	53	87	43	80	28	63
Casing size (cm)	238	238	264	264	279	279	289	289	314	314	340	340
Weight	20	20	22	22	22.5	22.5	23	23	26	26	27	27

*factory set : 31 cm

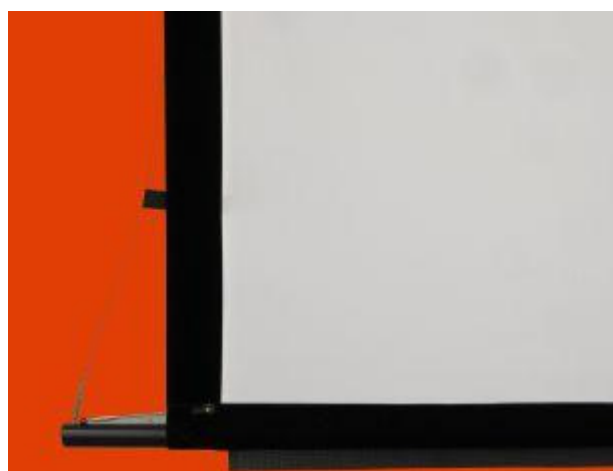

[installation manual 230 v](#)



Trade Supplier

